

4K60 Wireless HDMI Extender

OnCollab AirX 4K Quick Start Guide

AVAOCAX4KQSG V1.0



• Connections and Indicators

Receiver (RX)

1. HDMI Output: Connect with display.
2. USB: Connect with mouse and keyboard for USB KVM function, you can also connect with touch panel USB port for touch panel back control.
3. Reset: Reset to factory.
4. USB-C: Connect with 5V/2A power adapter.
5. Power Switch
6. IR Window: IR extended function.
7. LED Indicator

Transmitter (TX)

1. HDMI In: Connect with the video source.
2. HDMI Out: Connect with display for Pass-through.
3. Micro USB: Video source for KVM function.
4. IR Port: Video source for IR extended function.
5. USB-C: Connect with 5V/2A power adapter.
6. Power Switch
7. LED Indicator

• LED Indicators

Receiver (RX)

● Flashing Blue	Waiting for connection
● Blue	Connected

Transmitter (TX)

● Red	TX system is booting on
● Blue	Connected
● Purple	No video input signal

• Package Included

Receiver (RX)

Receiver x 1
Power Adapter x 1
USB-C Cable x 1

HDMI Cable x 1


Transmitter (TX)

Transmitter x 1
Power Adapter x 1
USB-C Cable x 1


HDMI Cable x 1
Micro USB Cable x 1
IR Transmitter Cable x 1

• Installation

Connect the Transmitter (TX)

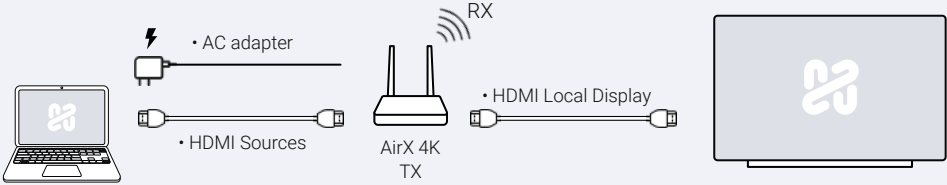


Connect the Receiver (RX)

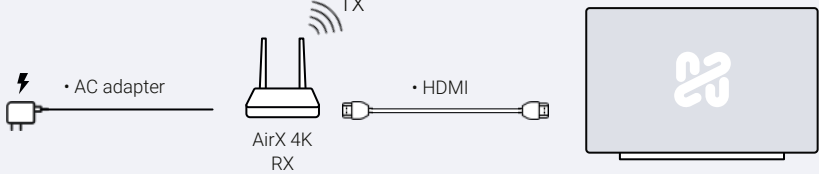

• Connecting IR Return

Ensure the IR cable's LED is attached exactly over the HDMI source's infrared sensor.
IR function only for the devices which has the IR mode.

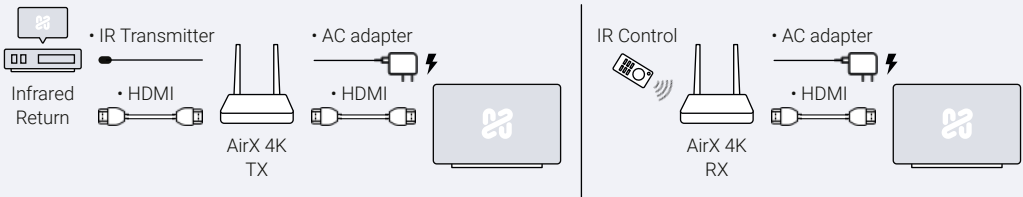

• Touch Panel Control

AirX 4K supports touch panel back control function when connecting with screen/panel.
User can touch the big screen to control the PC easily.


- 1 Connect the Receiver via HDMI cable with the display (touch panel) and use an USB cable to connect your display to the USB-A port of the RX for touch back control.
- 2 Connect the Transmitter with your PC via HDMI/USB cable.
- 3 Touch the display to control the PC.

*Android, iOS, Linux devices don't support touch back control function.
The USB cable should have data function.

• Pairing a Transmitter and Receiver

A set of AirX 4K includes one Receiver and one Transmitter, which are already paired.
However, if you need to re-pair, you need to follow the instruction below:

- 1 Power on the Transmitter.
The LED indicator light flashes **blue**.
- 2 Power on the Receiver
Power on the receiver till it's on the main menu.
The LED indicator light will flash **red**.
- 3 Press
Press the receiver's reset button and hold for 5 seconds till the **red** LED is flashing fast.
- 4 Pairing
Wait around 30 seconds, the transmitter and receiver will paired automatically.

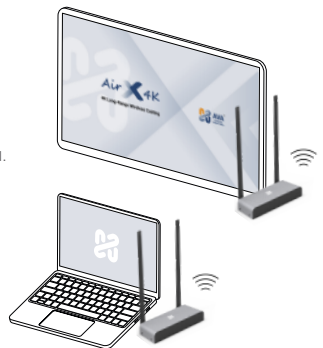

AVA Web
avacast.net
Copyright eMPIA Technology Corp.



Product Registration
support/product-registration